

DRIVE BELT ROUTING

1993 Jeep Cherokee

1993 ENGINE COOLING
Chrysler Corp. Drive Belt Routing

Jeep; Cherokee, Grand Cherokee, Wrangler

NOTE: Information for Grand Cherokee and Grand Wagoneer with 5.2L V8 engine is not available from manufacturer.

SPECIFICATIONS


BELT ADJUSTMENT

Loosen rear mounting bolts of idler pulley or power steering pump (if equipped). Loosen power steering pivot bolt and lock nut (if equipped). Turn adjusting bolt to tighten belt to specification. See BELT TENSION table. Tighten bolts and lock nut to 20 ft. lbs. (27 N.m). For serpentine belt routing, see Fig. 1.

BELT TENSION TABLE (1)

Application	New Belt	Used Belt
Serpentine Belt	180-200 (82-91)	140-160 (64-73)


(1) - Tension in lbs. (kg) using strand tension gauge.

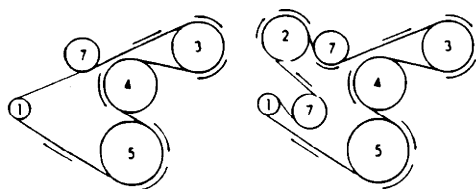

Cherokee & Wrangler
(2.5L Engine)
Grand Cherokee
(Without A/C)

Grand Cherokee
(With A/C)

1. Alternator
2. A/C Compressor
3. Power Steering Pump
4. Water Pump
5. Crankshaft
6. Cooling Fan
7. Idler Pulley

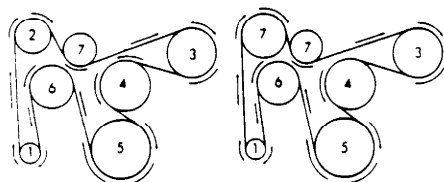

Cherokee & Wrangler
(4.0L Engine With A/C)

Cherokee & Wrangler
(4.0L Engine Without A/C)

93A75911

Fig. 1: Routing Serpentine Belts
Courtesy of Chrysler Corp.